








# A pad for realization of tools, such as floor sponges, brushes, dusters and the like, for cleaning and otherwise treating surfaces

**Patent number:** EP0697269  
**Publication date:** 1996-02-21  
**Inventor:** MELICONI LORIS (IT)  
**Applicant:** MELICONI SPA (IT)  
**Classification:**  
**- International:** A47L13/24; A47L13/254; B25G3/30; B25G3/38; F16C11/06; F16C11/12; A47L13/20; B25G3/00; F16C11/04; F16C11/06; (IPC1-7): B25G3/10; B25G3/38  
**- european:** A47L13/24; A47L13/254; B25G3/30; B25G3/38; F16C11/06; F16C11/12  
**Application number:** EP19950830329 19950727  
**Priority number(s):** IT1994BO00380 19940803; IT1995BO00045 19950210

## Also published as:

 EP0697269 (A)  
 CA2154839 (C)


## Cited documents:

 FR1121706  
 EP0137080  
 GB975681  
 DE887335  
 US3016556  
 more >>

Report a data error here

## Abstract of EP0697269

The invention relates to a pad (1) for making tools and/or instruments for cleaning and treating surfaces in general, which is of a type provided with an attachment (2) for a handle (3), wherein a connection of the pad (1) to the handle (3) is constituted by an elastic hinge (4) which is coaxial to the attachment (2) and is interpositioned between the pad (1) and the handle (3), constituting a torsional and axial constraint therebetween and leaving the handle (3) free to move into any inclined position with respect to the pad (1), while leaving the constraint unaltered; in use, for any inclination of the handle (3) and for any rotation thereof about its longitudinal axis and for any axial thrust imparted thereon, the elastic hinge (4) is able to transmit to the pad (1) torsional forces and thrusts able to cause the pad (1) to move forwards and backwards while remaining completely in contact with a surface to be treated (28) on which it rests and operates. <MATH>

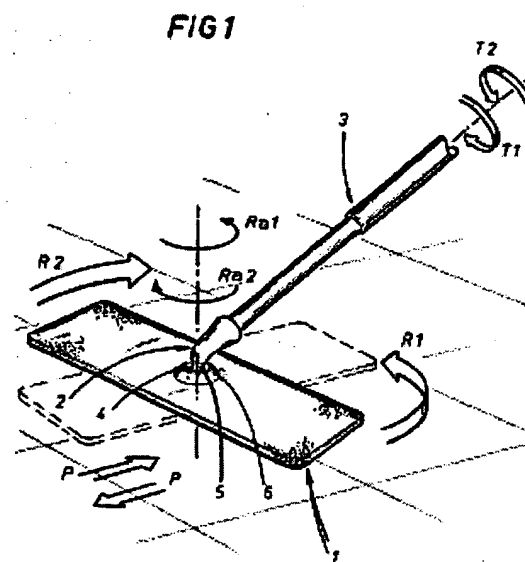

Data supplied from the esp@cenet database - Worldwide